

# DECORATIVE EXTERIOR LED COACH LANTERN

## 4 PANEL

- Integrated LED
- Top and bottom arm coach lanterns
- Available in bottom arm PIR motion and day & night sensor
- PP moulded housing
- Suitable for residential and commercial outdoor spaces including: entrances, driveways, patios & walkways






**4000K**  
NEUTRAL  
WHITE

**25,000**  
HOURS

**BLACK**  
FINISH

**IP44**  
RATED

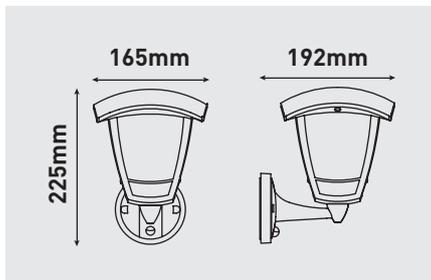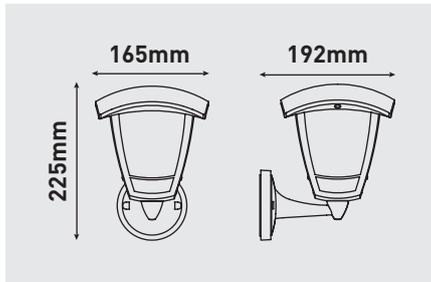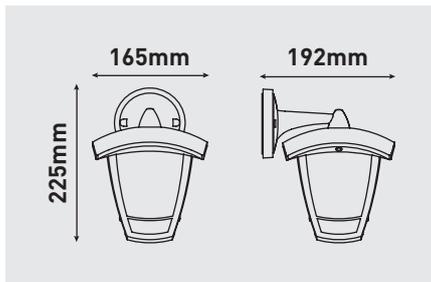

CAT NO.	LUMENS	WATTAGE	EQUIVALENT WATTAGE
LEXCL4T6B4	640	8W	60W
LEXCL4B6B4	640	8W	60W
LEXCL4B6B4P	640	8W	60W

**LUCECO**



This luminaire is compatible with bulbs of the energy classes:




874/2012 

**STANDARDS**

EN 60598-1	Luminaires - General requirements
EN 60598-2-2	Luminaires - Recessed
EN 60598-2-22	Luminaires - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)





